


Small Signal Switching Diode



Features

- Epoxy meets UL-94 V-0 flammability rating and halogen free
- Moisture Sensitivity Level 1
- V_R 250V
- I_{FAV} 200mA
- Part no. with suffix "Q" means AEC-Q101 qualified

Applications

- General Purpose Switches Diodes
- Automotive

Mechanical Data

- **Case:** DFN1110-3L-SWF
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102

■ Maximum Ratings ($T_a=25^\circ\text{C}$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	CONDITIONS	VALUE
Reverse Voltage	V_R	V		250
Forward Current	I_F	mA		200
Peak Forward Surge Current	I_{FSM}	A	$t=8.3\text{ms}$	1
Power Dissipation	P_{tot}	mW		200
Thermal Resistance Junction to Ambient	R_{thJA}	K/W		625
Junction Temperature	T_j	$^\circ\text{C}$		-55 to +150
Storage Temperature Range	T_{stg}	$^\circ\text{C}$		-55 to +150

■ Electrical Characteristics ($T_a=25^\circ\text{C}$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	CONDITIONS	MIN	MAX
Forward Voltage	V_F	V	$I_F=100\text{mA}$		1
			$I_F=200\text{mA}$		1.25
Reverse Current	I_R	μA	$V_R=200\text{V}$		0.1
Breakdown Voltage	V_{BR}	V	$I_R=100\mu\text{A}$	250	
Junction Capacitance	C_J	pF	$V_R=0\text{V}, f=1\text{MHZ}$		5
Reverse Recovery Time	t_{rr}	ns	$I_F=I_R=10\text{mA}, I_{rr}=1\text{mA}, R_L=100\Omega$		50



BAV23CQBQ

■ Ordering Information (Example)

PREFERRED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
BAV23CQBQ	F1	Approximate 0.0019	10K	100K	400K	7" reel

■ Characteristics (Typical)

Fig.1: P_D-T_A

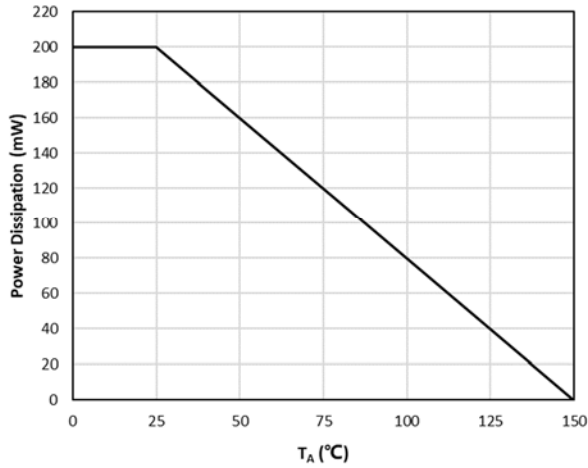


Fig.2: Capacitance Characteristic

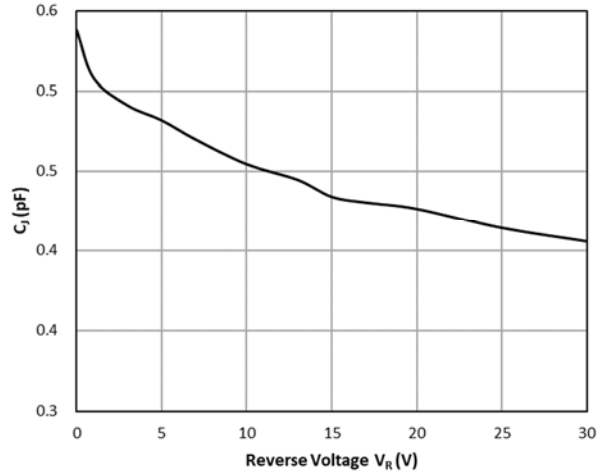


Fig.3: Forward Characteristic


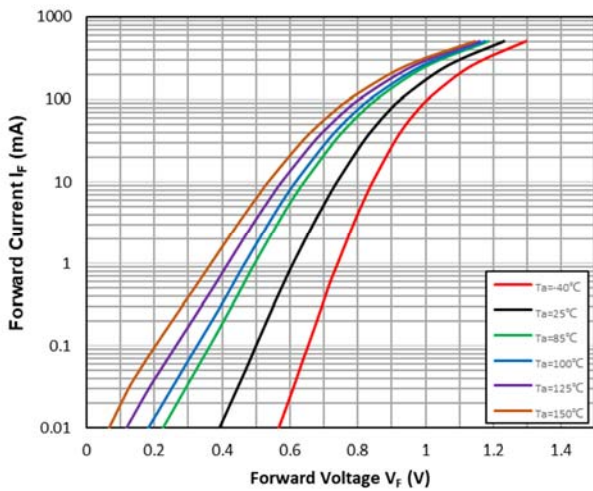



Fig.4: Reverse Characteristics



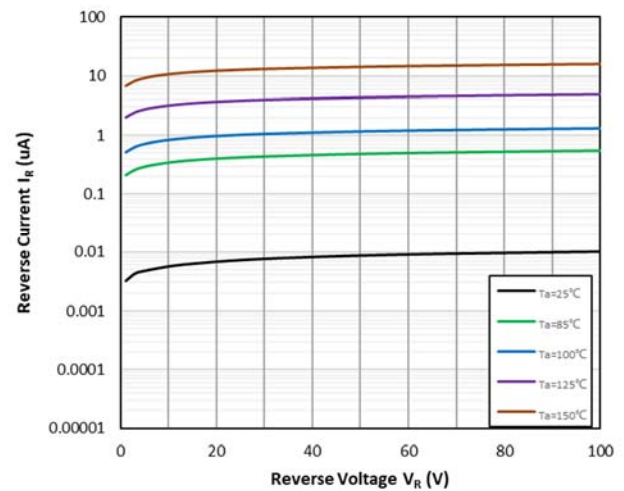


BAV23CQBQ

■ Outline Dimensions

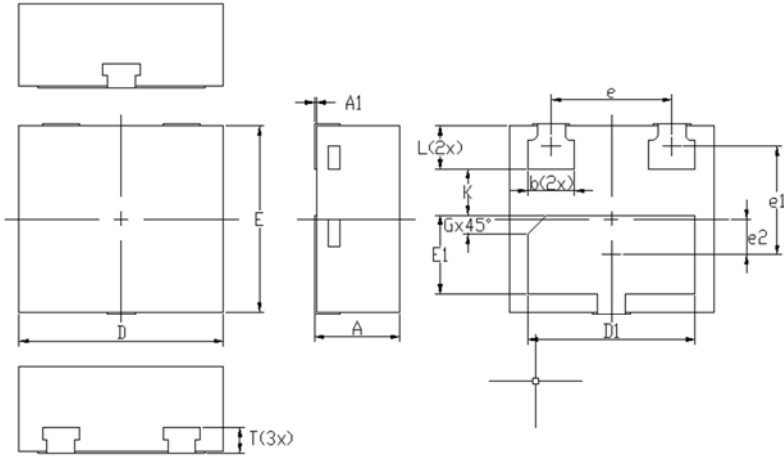

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	0.4200	0.4700	0.5200
A1	0.0050		0.1000
b	0.1600	0.2500	0.3400
D	1.0000	1.1000	1.2000
D1	0.8500	0.9000	0.9500
E	0.9000	1.0000	1.1000
E1	0.3800	0.4300	0.4800
e	\	0.6500	\
e1	\	0.5800	\
e2	\	0.1900	\
G	\	0.1<REF>	\
K	0.2000	\	\
L	0.1800	0.2300	0.2800
T	0.1000	0.1600	0.2200

■ Marking Information

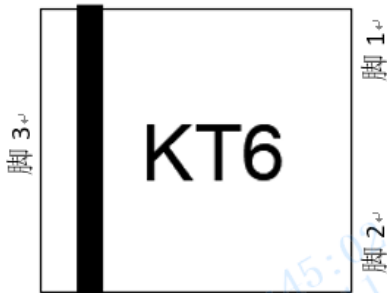

Note:

1. All marking is at middle of the product body
2. All marking is in laser marking
3. KT6 is Marking Code
4. Body color: Black



BAV23CQBQ

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with automotive electronics, are not designed for use in medical, life-saving, life-sustaining, or military, Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.